




Quality, Reliability, Life

Centrifugal Monoblock Stainless Steel Pump

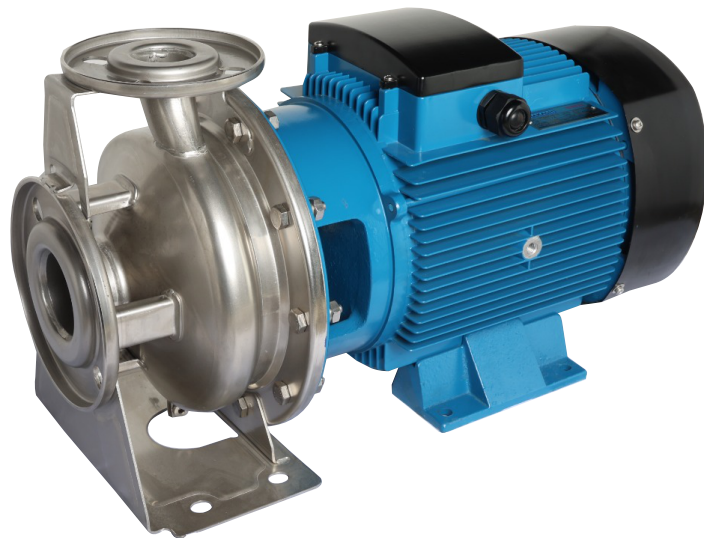

www.prakashpump.com

Applications

- Pressure boiler feeding
- Pure water treating system
- Refining chemical industries
- Hot & cold-water circulation
- Washing & sprinkling
- Water supply Systems

Performance Range

- Flow: up to 42 m³/h
- Head: up to 62m
- Speed: 2900 RPM
- Power: 2.2-7.5 Kw

Application Limits

- Liquid temperature: up to 80 °c
- Ambient temperature: up to 40°C
- Max. working pressure: 10 Bar
- Liquid PH value: 4-10
- Altitude: <1000m

Motor Details

- 2 pole induction motor
- Protection: IP55
- Insulation class: F
- Voltage: 380-420v, 50Hz
- Duty: S1


Installation and use

PCM stainless steel is the most advanced series of centrifugal Monoblock stainless steel pumps, with its liquid flow section made entirely of stainless steel 304 & (316 on request). Compliant with DIN24255 standard, it has excellent quality and efficiency to meet the complex application requirements of today's construction services and general industry. the PCM motor is tightly coupled with the water pump, and the impeller is installed on the extension shaft of the motor. PCM is equipped with IP55 weatherproof rating, IEC standard, aluminum frame motor. Starting from 11kW, the motor frame should be made of cast iron. The snail shell is designed as an integrated component

Pump Selection Chart

Model	Power		Voltage (50Hz)	Inlet/ outlet	Max. Flow (m ³ /h)	Max. Head (meter)	Net Weight (Kg)	Max. Suction (m)
	HP	KW						
PCM50-32-3.0S	3.0	2.0	220-240v	2" x 1.25"	20	37	36.4	3
PCM50-32-3.0T	3.0	2.0	380-420v	2" x 1.25"	20	37	34.8	3
PCM50-32-5.5	5.5	4.0	380-420v	2" x 1.25"	22	56	51.7	3
PCM50-32-7.5	7.5	5.5	380-420v	2" x 1.25"	22	62	70.5	3
PCM65-40-10	10	7.5	380-420v	2.5"x1.5"	42	57	75.1	3

G.A. Drawing

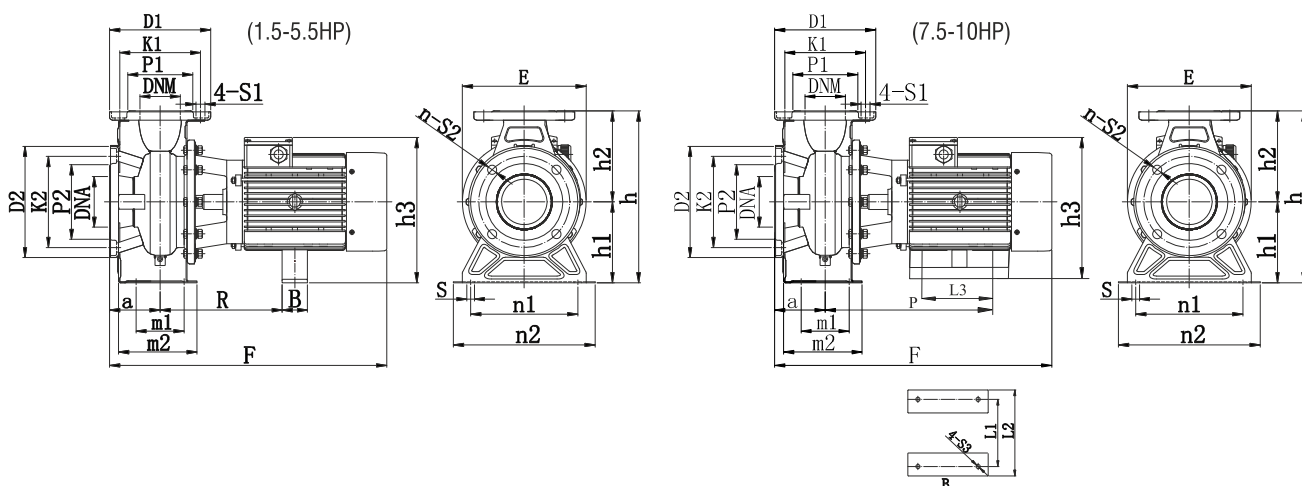


Pump Dimension


Model	Dimension in mm																														
	DNA	DNM	E	F	h	h1	h2	h3	a	m1	m2	n1	n2	S	B	R	P	L1	L2	L3	L4	S3	n	D2	K2	P2	S2	D1	K1	P1	S1
PCM50-32-3.0S	50	32	244	493	292	132	160	253	80	70	123	190	240	15	15	223	-	-	-	-	-	-	4	165	125	99	18	140	100	76	18
PCM50-32-3.0T	50	32	244	493	292	132	160	253	80	70	123	190	240	15	15	223	-	-	-	-	-	-	4	165	125	99	18	140	100	76	18
PCM50-32-5.5	50	32	295	548	340	160	180	288	80	70	124	190	240	15	50	231	342	-	-	-	-	-	4	165	125	99	18	140	100	76	18
PCM50-32-7.5	50	32	295	575	340	160	180	329	80	70	124	190	240	15	-	-	-	216	255	140	-	12	4	165	125	99	18	140	100	76	18
PCM65-40-10	65	40	295	595	340	160	180	329	100	70	146	212	265	15	-	-	-	216	255	140	-	12	4	185	145	118	18	150	110	84	18

Pump Performance chart


Model	Power		Q	US GPM	0	13	26	40	53	66	79	88	97	106	123	141	158	185
				M³/H	0	3	6	9	12	15	18	20	22	24	28	32	36	42
	KW	HP		LPM	0	50	100	150	200	250	300	333	367	400	466	533	600	700
PCM50-32.30S	2.2	3.0	Head (m)	37	35	33.5	32.5	31.5	30	28.5	27							
PCM50-32.30T	2.2	3.0	Head (m)	37	35	33.5	32.5	31.5	30	28.5	27							
PCM50-32-5.5	4.0	5.5	Head (m)	56	54	51	50	49	47.5	46	45	43						
PCM50-32-7.5	5.5	7.5	Head (m)	62	60	59.5	58	57	56	55	54	52						
PCM65-40-10	7.5	10	Head (m)	57	55.5	54	53.5	53	52.5	52.5	52	51	50	49	47	46.5	44.5	

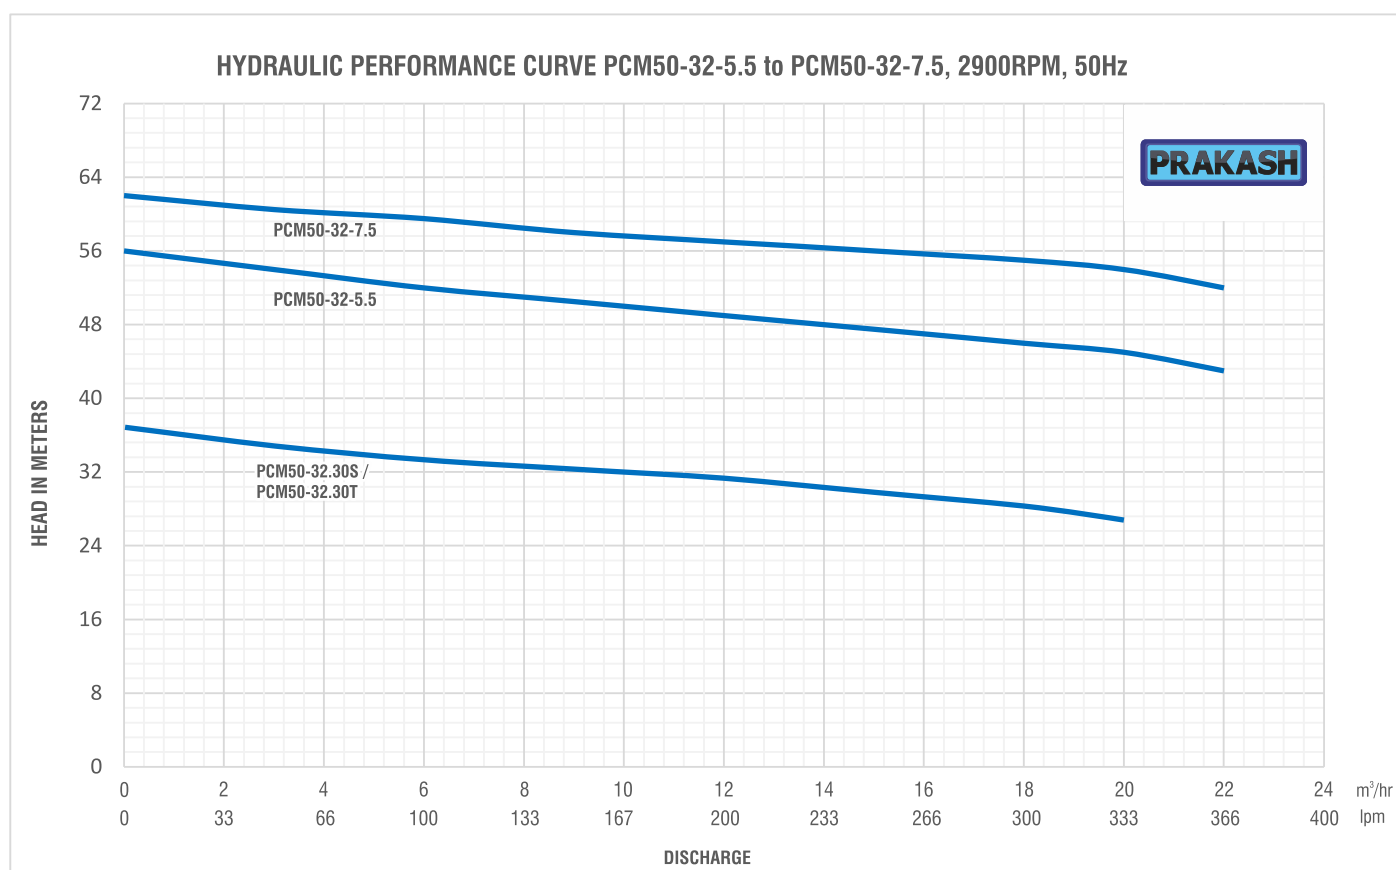

HYDRAULIC PERFORMANCE CURVE PCM65-40-10, 2900RPM, 50Hz

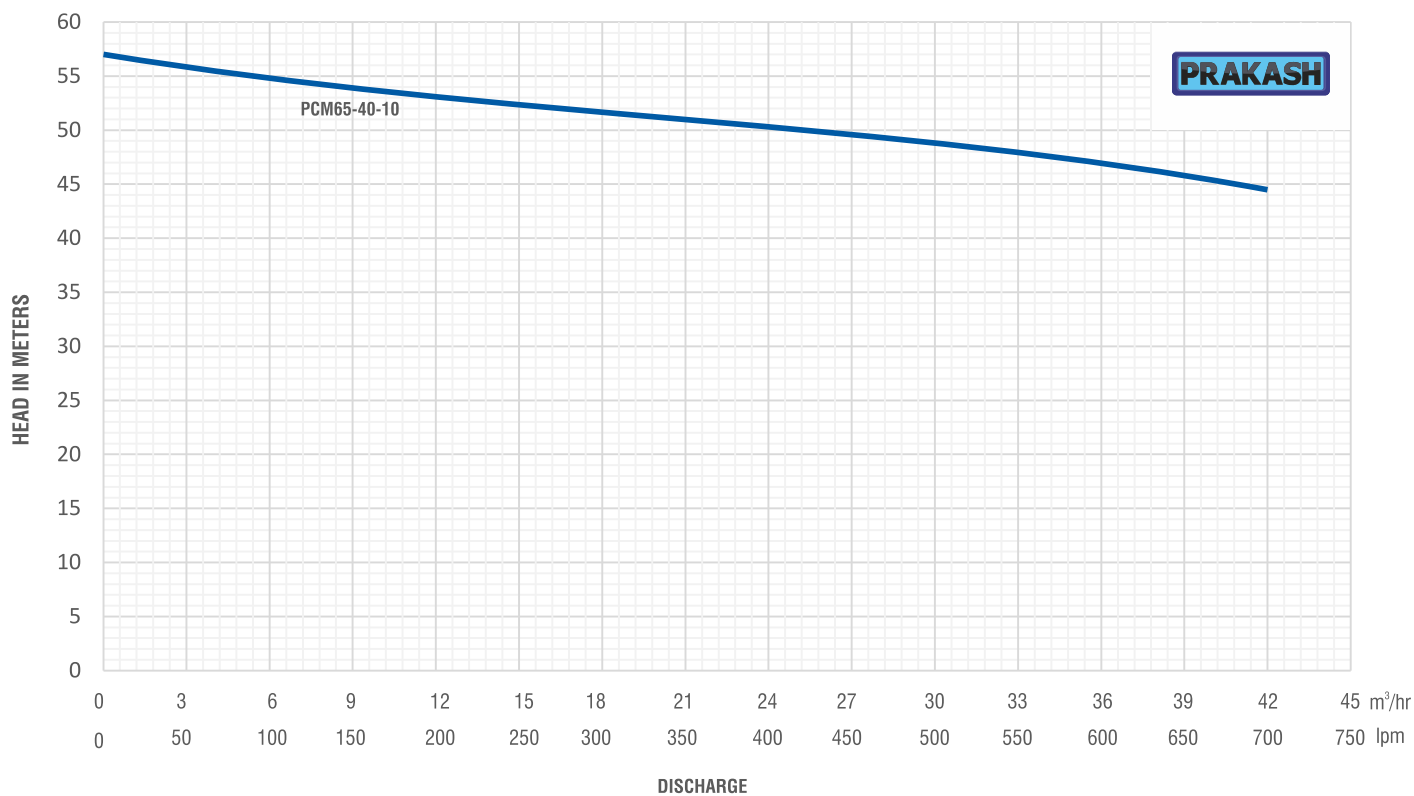

Exploded view

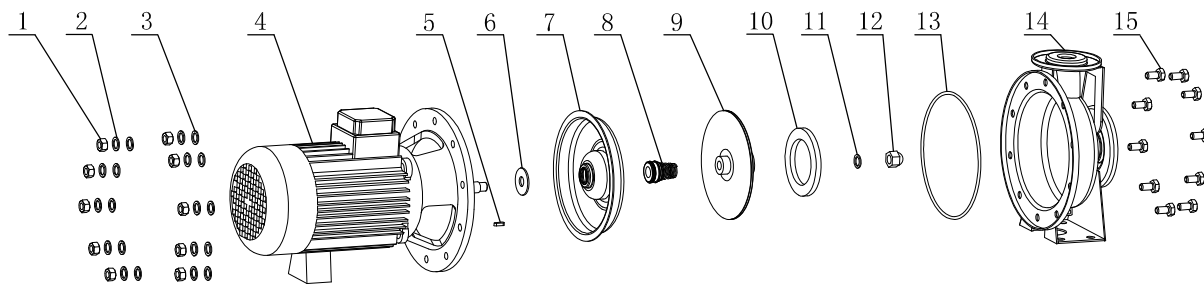

Material of Construction (MOC)

Code no.	Part name	Material	Code no.	Part name	Material
1	Nut	SS304	9	Impeller	SS304
2	Spring washer	SS304	10	Wear ring	PPO
3	Plan washer	SS304	11	Spring washer	SS304
4	Motor		12	Impeller nut	SS304
5	Shaft key	SS304	13	O-ring	Viton
6	V slinger	NBR	14	Casing	SS304
7	Back cover	SS304	15	Bolt	SS304
8	Mechanical seal	Sic-Viton			

PRAKASH

Office in India

PRAKASH PUMP

Survey No. 479, Opp. Supreme Estate-1, Zak Kadadara Road, Vill. - Kadadara,
Tal. Dahegam, Gandhinagar, Gujarat 382305 INDIA E-mail: sale@prakashpump.com

Distributor Office for Middle East

PRAKASH PUMP EST

P.O. Box: 20973 Industrial Area Al Ain (United Arab Emirates)
Tel.: +971 3 7222733 Mob.: +971 50 6731283 E-mail: sale@prakashpump.com

Distributor Office for Oman

GLOBAL EQUIPMENT MATERIAL CO. LLC

P.O. Box. 227, Postal Code: 320 Nakhal Road, Barka (Sultanate of Oman)
Tel.: +968 26883982 Mob.: +968 94584686 E-mail: oman@prakashpump.com

Distributor Office for Saudi Arabia

PRAKASH PUMP INDUSTRY

P.O. Box 14327, Bldg. 3616, Al Marwah 6447, Al Mishael Riyadh City, (Kingdoms of Saudi Arabia)
Sulay Exit 18. Mobile: +966 539811109 Email: saudi@prakashpump.com

Factory Address

PANJI ENGINEERING PVT LTD

Survey No. 479, Opp. Supreme Estate-1, Zak Kadadara Road, Vill. - Kadadara,
Tal. Dahegam, Gandhinagar, Gujarat 382305 INDIA E-mail: sale@prakashpump.com



To get
Quotation by email



PRAKASHPUMPEST

These images given are only for illustration purpose
for further details contact the sales team at
sale@prakashpump.com / oman@prakashpump.com
/ saudi@prakashpump.com



To get
Website

